


BM34 HERCULES

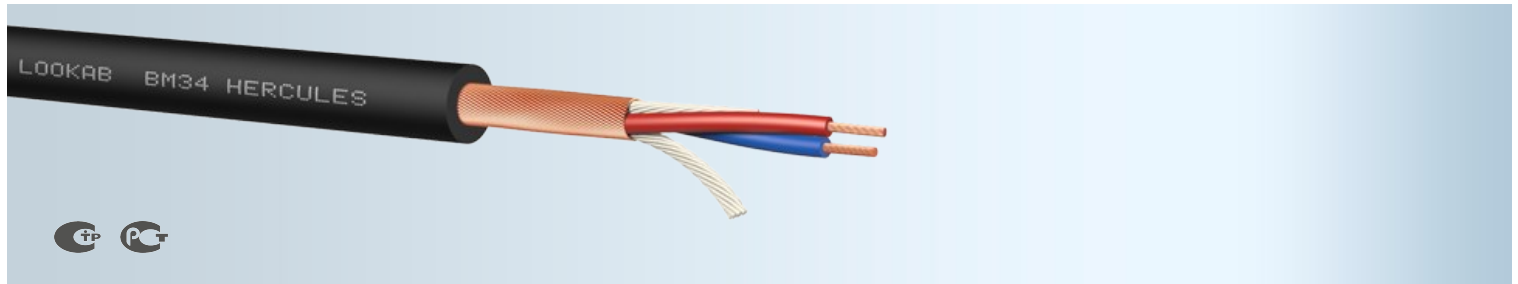

Cable Structure

Conductor	42x 0.10 mm (2x0.34mm ²) Stranded OFC Wires
Insulation	Ø 1.55mm PE, blue, red
Filler	Cotton Cords
Shielding	Bare copper spiral shield, 100% Coverage
Outer Sheath	Ø 6.5 mm Flexible PVC, Matt; Color: Black, blue, red, yellow
Standard Packing	100 m Carton Spool 300 m /1000 m Plywood Spool
Cable Weight(approx.)	55 kg/km

Areas of use

BM34 flexible balanced microphone cable is used for flexible applications like stages, fixed installations and also for studio applications.

Technical & Electrical Properties

Conductor Resistance(max.)	57 Ω/km
Shield Resistance	<30 Ω/km
Capacitance(max.) (Core /Core-Core / Cores+Shield)	58nF/km -115 nF/km
Test Voltage (50 Hz) (Core/Core - Core/Screen)	500 V-500 V
Insulation Resistance	>5 GΩxkm
Temperature Range	Fixed -30 °C.....+70 °C