


TS40

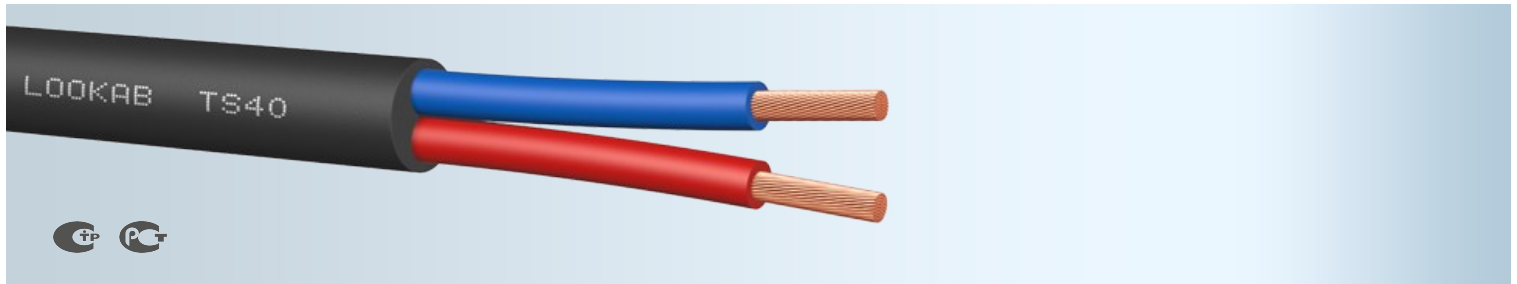

Cable Structure

Conductor	224x 0.15 mm (2x4.0mm ²) Stranded Bare OFC Wires
Insulation	Ø 3.90mm PVC blue-red
Outer Sheath	Ø9.4 mm Flexible PVC, Matt, Dark Gray
Standard Packing	100/500 m Plywood Spool
Cable Weight(approx.)	165 kg/km

Areas of use

High flexible speaker cables are ideal for sound and Hi-Fi systems. These small diameter robust cables are easy to wind and install.

Technical & Electrical Properties

Conductor Resistance(max.)	4.95 Ω/km
Operating Voltage	300 V
Test Voltage (50 Hz)	2000 V
Insulation Resistance	>200 M.Ωxkm
Temperature Range	Fixed -30 °C.....+70 °C