


VT32 / Dry contacts board

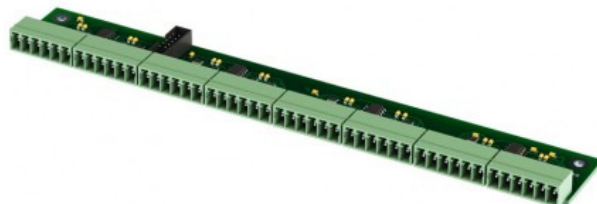

Inputs

32 dry contacts

Operating characteristics

Temperature : Min. -10° C - Max.80° C,
Humidity : Min. 5% - Max. 95% (Non-Condensing)

Mounting

3 screws M3*5

Components

Manufactured in E.U.