


Voice

## Connect/Disconnect Modules

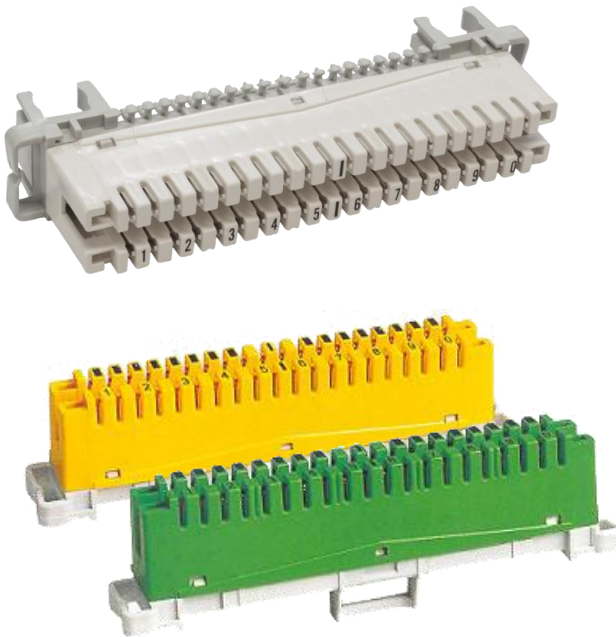

Linxcom Connect/Disconnect modules provide a complete solution for voice, mid and low speed data transmission.

The modules can be mounted on main distribution frames/cabinets or distribution boxes for use in connection of exchange lines and jumper wires.

### Features & Benefits

- IDC connecting technology
- Suitable for use in all xDSL and ADSL 2+ circuits
- Flexible indoor and outdoor use
- Robust long-term stability
- Overvoltage protection
- Available in 8 or 10 pair
- Designation labelling system
- Compatible with KRONE LSA-PLUS Modules
- Available with metal profile
- Other colours available

### Mechanical Characteristics

Insertion Life	250 cycles minimum
IDC Life	200 times (22-26 AWG solid wire) minimum
Material	PBT/ABS (UL94V-0)
Insulation Resistance	≥1000MΩ
Contact Resistance	<7MΩ
Dielectric Intensity	DC 1200V, 60s no spark over and fly arc
Conductor Diameter	AWG 22-26 (0.4-0.63mm)
Contact Material	Brass, Silver-plated
Operating Temperature	-10 to +60°C
Conformance	RoHS, EC European Directive 2002/96/EG

### Ordering Information

Using the available configurations amend/create a part number using the formula below.

Linxcom		Module Type	
Linxcom	<b>LXM</b>	Connecting Module	<b>CM</b>
		Disconnecting Module	<b>DM</b>
<b>LXM</b>	<b>10P</b>	<b>DM</b>	<b>GRY</b>
Pairs		Colour	
8 Pairs	<b>08P</b>	Grey	<b>GRY</b>
10 Pairs	<b>10P</b>	Yellow	<b>YEL</b>
		Green	<b>GRN</b>

Example: **LXM10PDMGRY** – Linxcom Voice 10 Pair Disconnecting Module Grey