


DX (Refrigerant R 410A) Based Cooling



CERTIFIED

- DX based cooling
- No raised floor required
- 28 kW cooling capacity
- Efficient power consumption
- Easy adaptation to different racks
- Mountable to the side of the rack
- Easy installation on the existing racks
- Patented space saving shape
- Integrated monitoring system
- Hot-swappable fans
- 300 mm width
- More than 1000 installations worldwide


Specifications	
Cooling capacity	28 kW
Air Inlet	38 °C
Number of fans	3 x
Type of fans	Radial
Air flow	3.800 m³/h
Power consumption	980 Watt
Current	4.3 A
Power supply	230 Volt/50 Hz.
Pipe connection (Liquid/Gas)	12.7/25.4 mm
Guaranteed Operating Range (Outdoor)	-15 °C / +46 °C
Noise level in 1 mtr. distance	62 dB(A)
Refrigerant	R410A
Dimensions	
Width	300 mm
Depth	1.000 mm
Height	2.000 mm
Weight	205 kg.
Color	RAL 9005 / RAL 7035



LCD Controller



Side cooler with two racks cooling

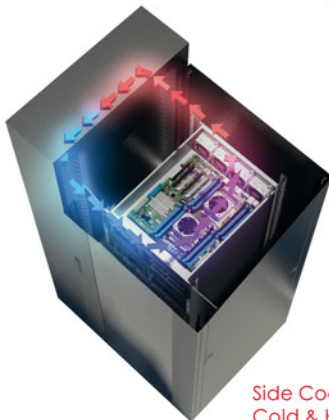

Side Cooler Cold & Hot Air Circulation

Product Code	Description (230VAC 50Hz)
DC-SCWX-4230-E01EU1-R0	DX 28 kW 42U 300 x 1000 with refrigerant R410A
DC-SCWX-4232-E01EU1-R0	DX 28 kW 42U 300 x 1200 with refrigerant R410A
DC-SCWX-4730-E01EU1-R0	DX 28 kW 47U 300 x 1000 with refrigerant R410A
DC-SCWX-4732-E01EU1-R0	DX 28 kW 47U 300 x 1200 with refrigerant R410A



Outdoor DX Unit-R410A
(Combined Compressor & Condenser)

* X : Color code = 7: RAL 7035 (Grey); 9: RAL 9005 (Black)